

YOUR PARTNER FOR INNOVATIVE MARKING

- COMPACT PRINTER DISPENSER WITH HIGH PERFORMANCE
- QUICK CHANGE OF PRODUCTS
- EASY OPERATION – DISPLAY WITH STRONG BACKLIGHT AND 100 PROGRAMS
- FLEXIBLE - UP TO 170 MM LABEL WIDTH
- CAN OPERATE WITH DATAMAX, ZEBRA AND SATO PRINT ENGINES





HM 600P – High performance printer dispenser solution

The HM 600 is a printer dispenser with high performance and efficiency. The control panel is integrated in the machine and built on a high-powered microprocessor ensuring high stability which, along with the stepper motor control, ensures high accuracy. The printer dispenser is highly flexible and is able to operate with up to 170 mm label width. The HM 600P can be operated with a remote display to ensure easy operation.

HM 600 P

TECHNICAL SPECIFICATIONS

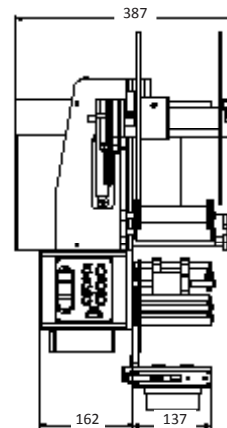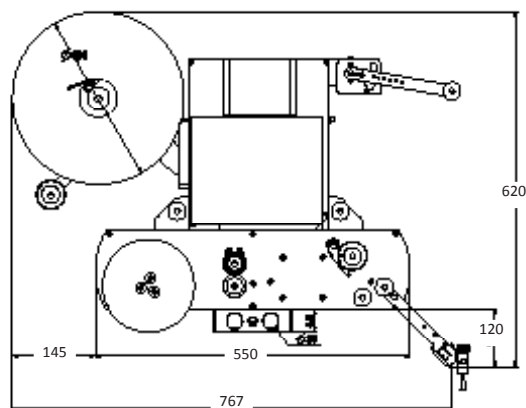

Applications	Top, side, and bottom. Modules for corner labelling and stamping optionally available	EXTRA IN AND OUTPUT	
		Encoder input	The machine speed automatically follows the product speed of 0-40 m/min.
		Alarm output.....	Relay output for "out of stock" (zero-potential)
		Extra outputs.....	2 outputs, max. 500 mA for external control of pneumatics in connection with labelling
		Alarm input.....	Printer error input allows locking the dispenser
LABELS		MACHINE SPECIFICATION	
Label width.....	15-170 mm	Material	Anodized aluminium and stainless steel
Label length	15-2000 mm	IP protection.....	IP 32
Label detector	Interspace (min. 2 mm) option: reflective	Dimensions (HxWxD)	897 + brush x 603 + brush x 386 mm
Label reel core diameter ...	Ø 40 mm, option: Ø 76 mm	Weight (approx.)	22 kg
Unwinder diameter	Ø 300 mm	Voltage/Power	230 V / 150 W
Material	Self adhesive labels with backing paper	Approbation.....	CE
		Warranty.....	1 year with 8 hours of operation per day, 5 days a week
DISPENSING		OPTIONS	
Labelling speed.....	0-40 m/min / 120mm label width	Fittings.....	H base, spindle system
		Applicator.....	Corner, stamp
Labelling speed.....	0-30 m/min / 170mm label width	Lights	Red alarm light
		Label low warning.....	Sensor detecting diameter
Labelling accuracy	+/- 0.5 mm	Non-stop operation	Double system switching automatically between two dispensers
Motor drive.....	Stepper motor		
Right and left hand version	Both options available		
Out of stock alarm.....	Zero-potential relay		
Program database.....	100 programs		
OPERATION			
Display.....	2 x 24 character display with backlight - 180° reversible		
Keyboard	6 keys		
Language	DK, GB, D, NL, F, I		
INTERNAL CONTROL			
Electronics.....	Microprocessor		

Subject to changes

ALL IPR RESERVED HM SYSTEMS

HM[®]
SYSTEMS